


Split Piso-Techo

R-410a - Frío solo

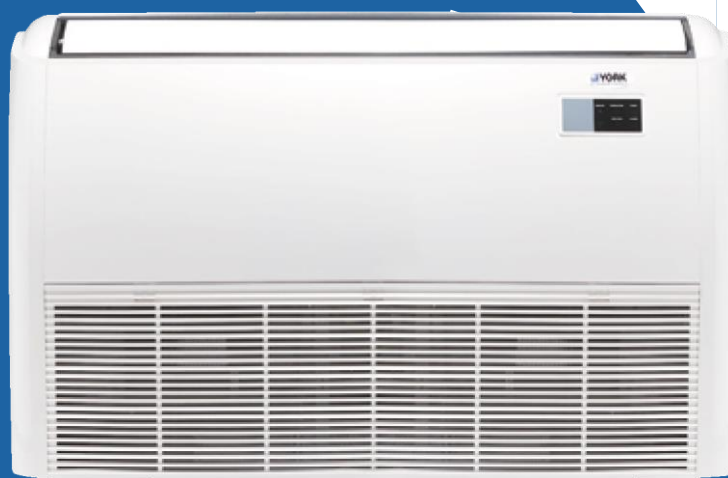

Split Piso-Techo

R-410a - Frío solo



Especificaciones

MODELO DE EVAPORADORA		YNFFXC024BAAD-FX	YNFFXC036BAAD-FX	YNFFXC048BAAD-FX	YNFFXC060BAAD-FX	YNFFXC036BAAD-FX	YNFFXC048BAAD-FX	YNFFXC060BAAD-FX
MODELO DE CONDENSADORA		YNVFC024BAADA-X	YNVFC036BAADA-X	YNVFC048BAADB-1	YNVFC060BAADB-1	YNVFC036BAQDB-1	YNVFC048BAQDB-1	YNVFC060BAQDB-1
Alimentación eléctrica	V-ph-Hz	220~230-1-60						
Alimentación eléctrica de Condensadora	V-Ph-Hz	220~230-1-60	220~230-1-60	220~230-1-60	220~230-1-60	220~230-3-60	220~230-3-60	220~230-3-60
Max. potencia de consumo	W	3800	5350	5600	6800	5350	5600	6800
Max. corriente	A	17.5	24.5	25	30	14	17	21
Enfriamiento	Capacidad	Btu/h	24000	36000	48000	58000	36000	48000
	Potencia de entrada	W	2512	3768	5024	6070	3768	5024
	EER	W/W	2.8	2.8	2.8	2.8	2.8	2.8
Motor de Evaporadora	Cantidad		1	1	2	2	1	2
	Potencia de entrada	W	165/125/95	235/200/172	174/157/144	231/186/164	235/200/172	174/157/144
	Capacitor	µF	2.5UF/450V	5UF/450V	6.5UF/450V	6.5UF/450V	5UF/450V	6.5UF/450V
	Velocidad (Hi/Med/Lo)	r/min	1470/1210/995	1320/1175/1050	1400/1220/1090	1630/1530/1420	1320/1175/1050	1400/1220/1090
Flujo de aire de evaporadora (Hi/Med/Lo)		m³/h	1296/980/775	1830/1600/1410	2548/2104/1790	2890/2422/2281	1830/1600/1410	2548/2104/1790
Nivel de ruido de evap (presión) (Hi/Med/Lo)		dB(A)	55/48/42	58/54/50	58/54/50	58/56/55	58/54/50	58/54/50
Evaporadora	Dimensiones (WxDxH)	mm	1068x675x235	1285x675x235	1650x675x235	1650x675x235	1285x675x235	1650x675x235
	Peso Neto/Bruto	kg	25.7/30.5	33/39	39.5/46	41.5/47.8	33/39	39.5/46
Presión de diseño		MPa	4.2/1.5	4.2/1.5	4.2/1.5	4.2/1.5	4.2/1.5	4.2/1.5
Diámetro de tubería de drenaje		mm	ODØ25					
Tubería refrigerante	Lado líquido/Lado gas	mm(inch)	9.52/15.9(3/8"/5/8")	9.52/19(3/8"/3/4")	9.52/22(3/8"/7/8")	9.52/22(3/8"/7/8")	9.52/19(3/8"/3/4")	9.52/22(3/8"/7/8")
Control			Remote control					
Temperatura de operación		°C	17~30					
Temperatura de ambiente		°C	17~32					
Qty'per 20' /40' /40'HQ			102/220/252	92/188/213	72/147/167	72/147/167	92/188/213	72/147/167
Compresor	Tipo		ROTARY	ROTARY	Scroll	Scroll	ROTARY	scroll
	Capacidad	Btu/h	24617	34529	48800	57000	35314	49000
	Potencia de entrada	W	2310	3260	4540	5460	3400	4537
	Corriente nominal (RLA)	A	11.3	15.6	25.1	25.6	10.9	18.7
	Capacitor	µF	60uF/450V	45uF/450V	80uF/450V	80uF/440V	/	/
	Aceite Refrigerante	ml	700	1867	1242	1242	880	1242
Motor ventilador de condensadora	Cantidad		1					
	Potencia de entrada	W	305	305	310	310	310	310
	Capacitor	µF	6UF/450V	6UF/450V	12uF/450V	12uF/450V	12uF/450V	12uF/450V
	Velocidad	r/min	1110	1110	1095	1095	1095	1095
Condensadora	Flujo de aire	m³/h	5100	5100	7400	7400	7400	7400
	Nivel de sonido (presión)	dB(A)	65	67	68	64	68	64
	Dimensiones (WxDxH)	mm	600x600x633	600x600x633	710x710x759	740x740x843	710x710x759	710x710x759
	Peso Neto/bruto	kg	43/46.5	60/63.5	75/78.5	88.1/92.8	73.3/77.8	75/78.5
Refrigerante	Tipo		R410A					
	Volumen de carga	kg	1.6	3.0	3.7	4.2	2.6	3.7
Presión de diseño		MPa	4.2/1.5	4.2/1.5	4.2/1.5	4.2/1.5	4.2/1.5	4.2/1.5
Tubería de Refrigerante	Lado líquido/lado gas	mm	9.52/15.9(3/8"/5/8")	9.52/19(3/8"/3/4")	9.52/22(3/8"/7/8")	9.52/22(3/8"/7/8")	9.52/19(3/8"/3/4")	9.52/22(3/8"/7/8")
	Longitud máxima	m	25	30	50	50	30	50
	Elevación máxima	m	15	20	25	25	20	25
Temperatura ambiente		°C	0~50					
Qty'per 20' /40' /40'HQ (condensadora)			81/171/228	81/171/228	42/96/144	72/147/167	42/96/144	72/147/167